


FLUOR-O-FLO® **Nozzle Liners**

Solid Virgin PTFE

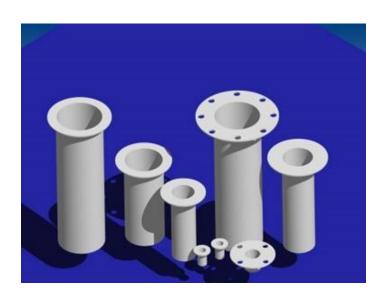

Nozzle Size

Standard liners fit nozzles from 1/2" to 18" pipe size. Special sizes available on request.*

Length

Up to 4" nominal pipe size, lengths available to 15 feet. Over 4" nominal size, lengths available to 30".

Flange Diameter

Minimum diameter of flange of standard liners corresponds to the raised face of ANSI Class 150 flanges. Full face or other special flange diameters available on request.

Thickness

Wall thickness of standard liners increases with liner size, from a minimum of 1/16" wall up to 1/4" wall. Nonstandard wall thickness available on request. Seal thickness equal to wall thickness standard, other seal thicknesses available on request.

Square cut end is standard. Diagonal cut available on request.

*Our nozzle liners are designed to fit both Schedule 40 and Schedule 80 piping, with the exception of ½" and ¾" sizes, which are available in Schedule 80 up to 12" only.

Complete Protection

Use our liners to protect nozzles of glass lined vessels:

- Prevent chipping from insertion and use of dip pipes, spargers, instrumentation, or dropped or mishandled tools
- Reduce scaling and buildup of solids.

Also use our liners to protect surfaces of unlined nozzles or tanks from corrosive fluids, abrasive slurries, or erosive high velocity fluid streams.

And you can use them to line bellows type expansion joints and flexible couplings:

- Eliminate erosion of bellows convolutes and of the rounded corners at I.D. of flared
- Eliminate caking and buildup of solids in convolutes.

Standard product line includes nominal

Widest Range of Sizes

sizes up to 18", in the length you need.

We can also custom make virtually any special size you need to meet the widest range of requirements:

- Nonstandard diameters
- Heavy wall thicknesses
- Full face flanges.


For worksheet, see reverse side.

Call today for our **Nozzle Liners Product Specifications**



FAX (914) 969-2736

Nozzle Liner Worksheet

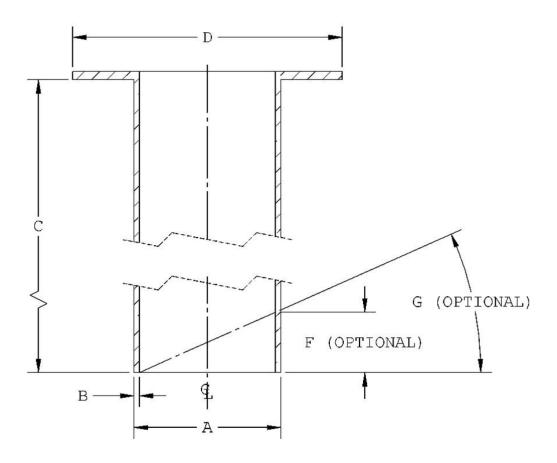

<u>Dimension</u>	<u>Description</u>	Size
Required Data:_		
A	Sleeve O.D. (smaller than the nozzle I.D. by 1/8" or more)	(max.—18" pipe size)
В	Sleeve wall thickness	
C	Sleeve length	
	(excluding flange)	(See Product Specs for maximum length)
D	Flange O.D.	(max.—21")
E	Flange thickness	
Optional Data:		
F	Diagonal cut —or—	
G	Diagonal angle	