
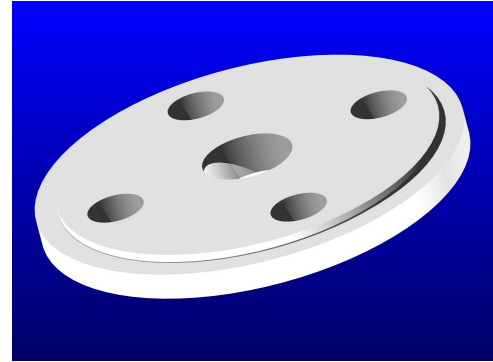


FLUOR-O-FLO®
Armored Spacers and Full Face Flanges

PTFE • PVDF • also PPL • CPVC

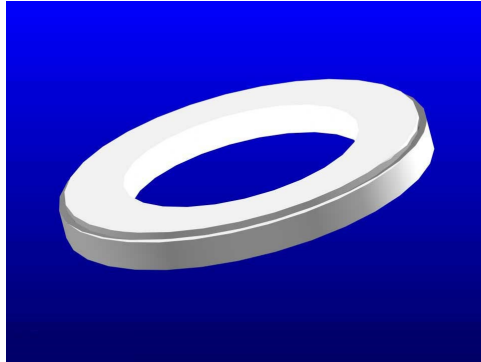

- Pipe sizes from 1/2" through 12", larger on request
- Class 150 and 300, and ISO metric sizes
- Standard lengths up to 6", longer lengths available, contact factory
- Steel armor thickness is 1/4"
- Steel armor coated with rust resistant primer

Micromold armored spacers complement plastic-lined piping systems by serving the same functions as solid plastic spacers, but with the pressure rating of steel pipe. They can also be used in place of lined spools or distance pieces at a fraction of the cost.

Ring, full-face, reducing, orifice, tapered and conical-bore configurations are available to suit your application. To ease installation, all sizes can be supplied with locator tabs. Most sizes are available from stock, or can be made quickly to suit your requirements.

Call today for our
Spacers & Flanges
Product Specifications

