


FLUOR-O-FLO® PTFE & PVDF Tank Adapters (Bulkhead Fittings)

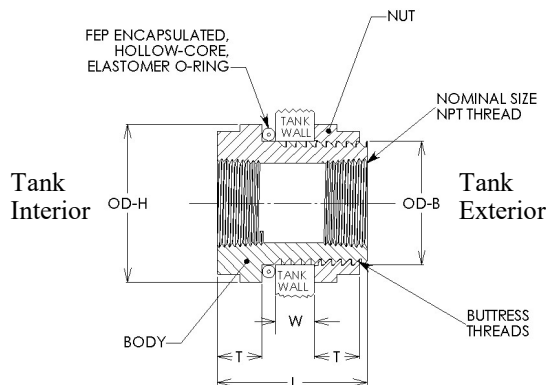

| Nominal Pipe Size | PTFE Part No. (Note 1) | PVDF FNPT Threaded Part No. | PVDF IPS Socket Weld Part No. | PVDF Metric Socket Weld Part No. | OD-H | T | OD-B | L | W MAX (Note 2) | MIN. TANK DIA. (Note 3) | Weight (lb.) |
|-------------------|------------------------|-----------------------------|-------------------------------|----------------------------------|----------|--------|----------|--------|----------------|-------------------------|--------------|
| 1/8" | F-TA01 | N/A | N/A | N/A | 1-5/8" | 1/2" | 1-1/8" | 1-3/4" | 1/2" | 12" | 0.20 |
| 1/4" | F-TA02 | N/A | N/A | N/A | 1-11/16" | 1/2" | 1-3/16" | 1-3/4" | 1/2" | 13" | 0.20 |
| 3/8" | F-TA03 | FK-TA03FT | FK-TA03SI | FK-TA03SM | 1-13/16" | 1/2" | 1-9/32" | 1-3/4" | 1/2" | 15" | 0.20 |
| 1/2" | F-TA04 | FK-TA04FT | FK-TA04SI | FK-TA04SM | 2-1/16" | 5/8" | 1-1/2" | 2-1/8" | 5/8" | 19" | 0.35 |
| 3/4" | F-TA06 | FK-TA06FT | FK-TA06SI | FK-TA06SM | 2-3/8" | 3/4" | 1-13/16" | 2-1/2" | 3/4" | 25" | 0.55 |
| 1" | F-TA08 | FK-TA08FT | FK-TA08SI | FK-TA08SM | 2-5/8" | 3/4" | 2-1/16" | 2-1/2" | 3/4" | 32" | 0.65 |
| 1-1/4" | F-TA10 | FK-TA10FT | FK-TA10SI | FK-TA10SM | 2-7/8" | 3/4" | 2-3/8" | 2-1/2" | 3/4" | 44" | 0.70 |
| 1-1/2" | F-TA12 | FK-TA12FT | FK-TA12SI | FK-TA12SM | 3-1/8" | 3/4" | 2-5/8" | 2-1/2" | 3/4" | 53" | 0.80 |
| 2" | F-TA16 | FK-TA16FT | FK-TA16SI | FK-TA16SM | 3-5/8" | 7/8" | 3-1/8" | 2-7/8" | 7/8" | 73" | 1.15 |
| 2-1/2" | F-TA20 | FK-TA20FT | FK-TA20SI | FK-TA20SM | 4-1/4" | 1-1/8" | 3-5/8" | 3-3/8" | 7/8" | 97" | 2.01 |
| 3" | F-TA24 | FK-TA24FT | FK-TA24SI | FK-TA24SM | 5-1/8" | 1-1/4" | 4-1/2" | 3-3/4" | 1" | 146" | 2.95 |
| 4" | F-TA32 | FK-TA32FT | FK-TA32SI | FK-TA32SM | 6-1/4" | 1-3/8" | 5-1/2" | 4" | 1" | 216" | 4.52 |

Note 1: Standard fitting includes FEP encapsulated, 0.210" diameter, silicone o-ring

Note 2: Body can be made longer to accommodate thicker tank walls.

Note 3: As supplied, fittings are suitable for use with flat-wall or most cylindrical, smooth-wall tanks to min. dia. shown. Custom adapters are available to permit use with smaller diameter tanks.

Call today for our FLUOR-O-FLO®
Tank Adapters Sales Bulletin